



G-Finder Single Single Gas Portable Detector

| 2 years warranty without replacement of battery and sensor | Easy to operate with one button | Real-time gas detection and display | Regular calibration period notification function | Periodic Bump Test Cycle Notification Function |

IMAGE

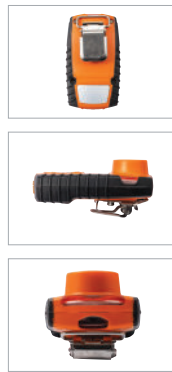

DIMENSION (Unit : mm)

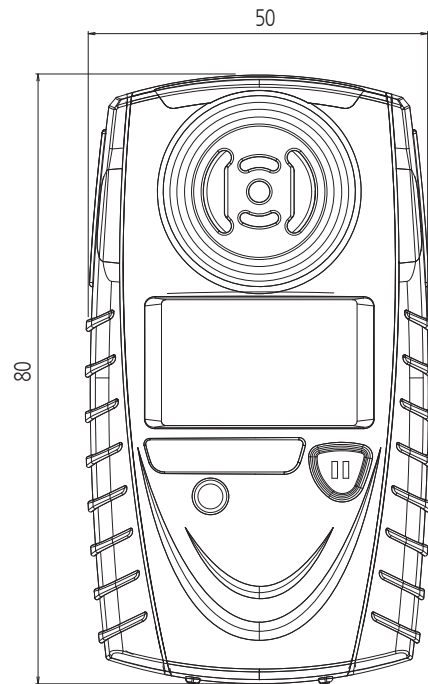

ACCESSORIES



Sampling pump

SPECIFICATION

※ Specifications are subject to be changed without prior notice.

G-FINDER SINGLE				
Case Material	Polycarbonate + Thermoplastic Polyurethane			
Dimension	80(W) x 50(H) x 41(D)mm (alligator clip included)			
Weight	103 g (alligator clip included)			
Operating Temperature	-20°C ~ +50°C			
Operating Humidity	5 ~ 95% r.h.			
Alarm	Visual, Vibrating, Audible			
Ingress Protection	IP 67			
Sensors	O2 / CO / H2S - Electrochemical sensor technology			
Display	Liquid Crystal Display (LCD)			
Battery	3.6V Primary lithium-thionyl chloride			
Measuring Ranges	Gas	Symbol	Range	Resolution
	Oxygen	O2	0 ~ 25% vol	0.1% vol
	Carbon Monoxide	CO	0 ~ 500 ppm	1 ppm
Factory Alarm Setpoints	Gas	Symbol	Low Alarm	High Alarm
	Oxygen	O2	19.5% vol	23.5% vol
	Carbon Monoxide	CO	35 ppm	200 ppm
	Hydrogen Sulfide	H2S	10 ppm	15 ppm
CERTIFICATION				
KCs	Ex ia IIC T4 Ga	ATEX / IECEx		Ex ia IIC T4 Ga
NEPSI	Ex ia IIC T4 Ga			